

DATA SHEET

DT 4.25 K


ROTARY VANE COMPRESSORS

oil-free

air-cooled

MAKE IT BECKER.



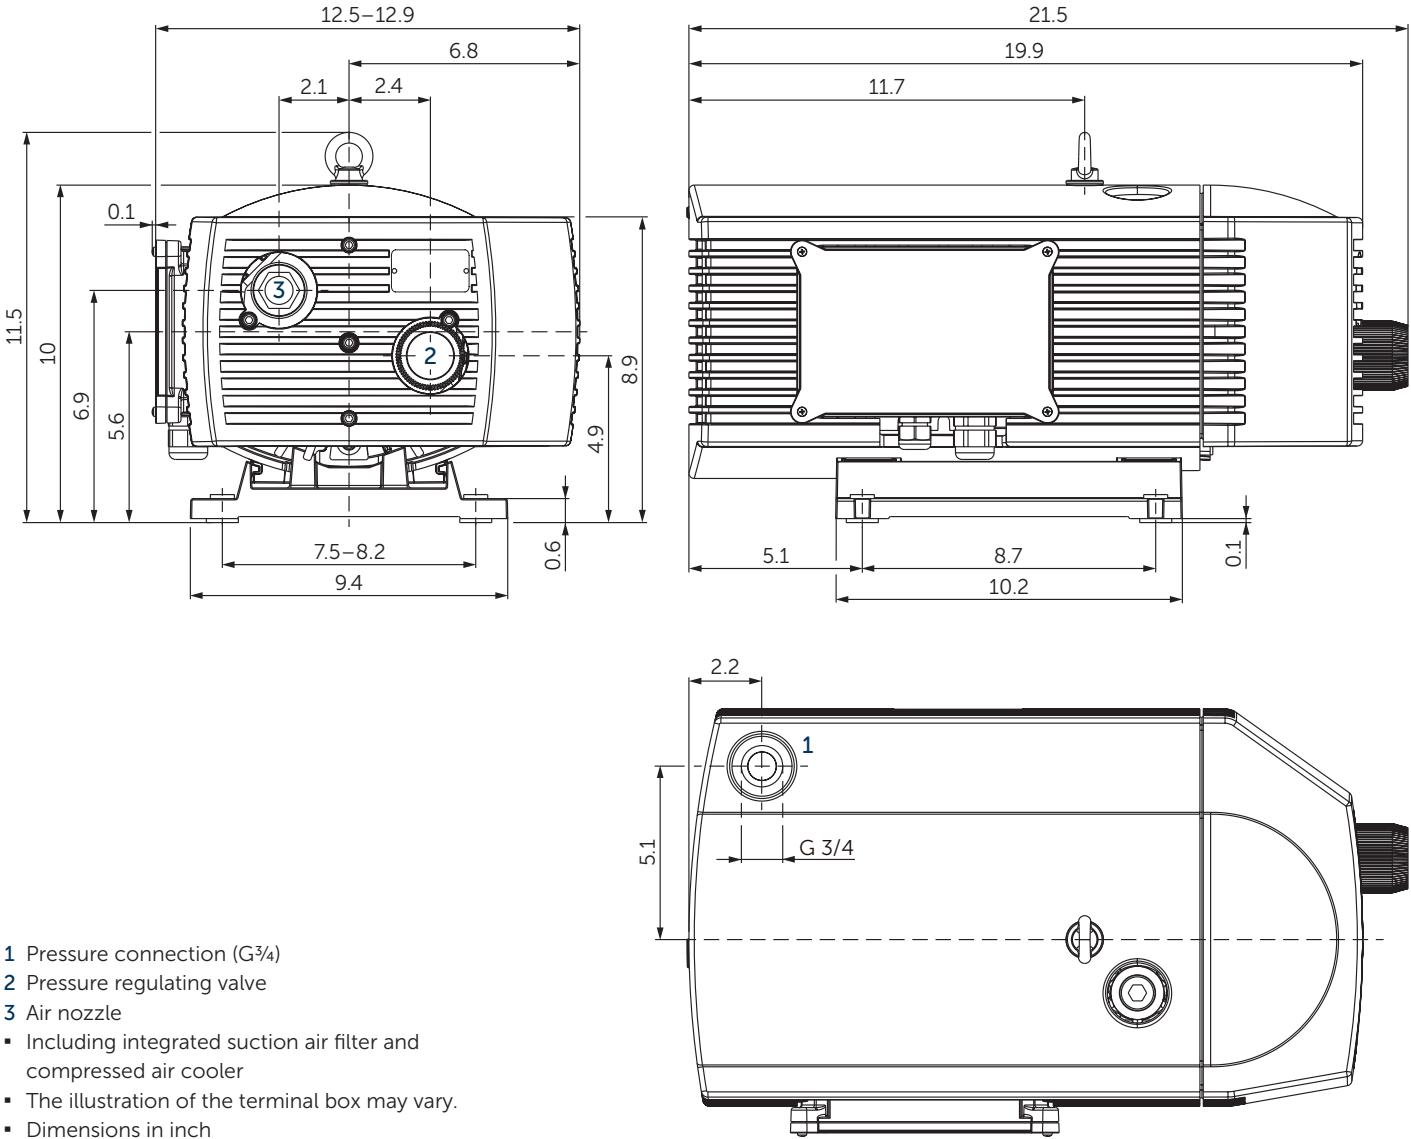




Blast air rate		Pressure		Emission sound pressure level ¹⁾		Weight incl. motor ²⁾
CFM		PSIG		dB(A)		lbs
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
14.7	17.6	14.5	14.5	65	67	≈80.5–86

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped

²⁾ Depending on the motor

3~ Motors											
#	50 Hz					60 Hz				Version	
	hp	V	rpm	A		hp	V	rpm	A		
01	1.5	Y400	IE3	1440	2.6		YY230/Y460	IE3	1735	5.0/2.5	UL (E113150) • CC046A
						1.7	YY208	IE3	1730	5.4	IP55 • ISO F
							Y400		1725	2.7	PTO bimetal 150°C
02	1.5	190–255/ 330–440		1420	4.8–5.5/ 2.8–3.2	1.7	190–290/ 330–500		1690	6.2–4.9/ 3.6–2.8	IP54 • ISO F • bimetal

1~ Motor									
#	50 Hz				60 Hz				Version
	hp	V	rpm	A	hp	V	rpm	A	
01	1.5	230 ±10%	1350	7.6					IP54 • ISO F • bimetal
02					1.7	220–240	1740	8.6–8.35	UL • CSA IP54 • ISO F

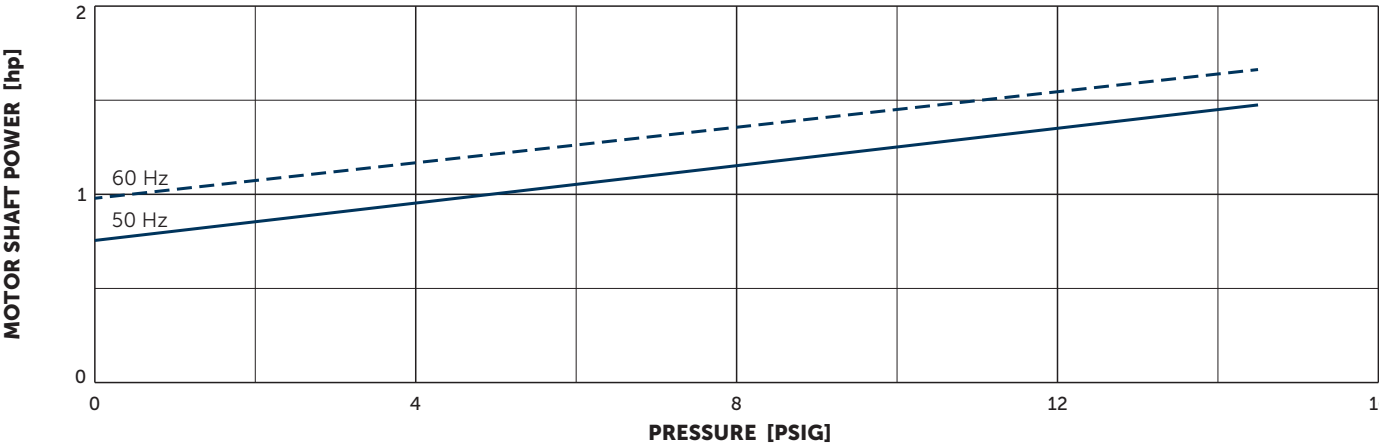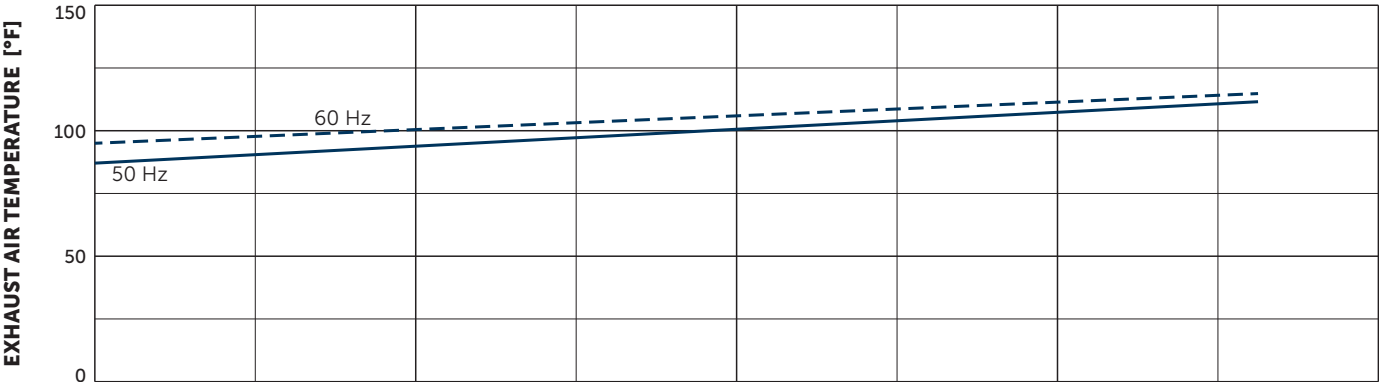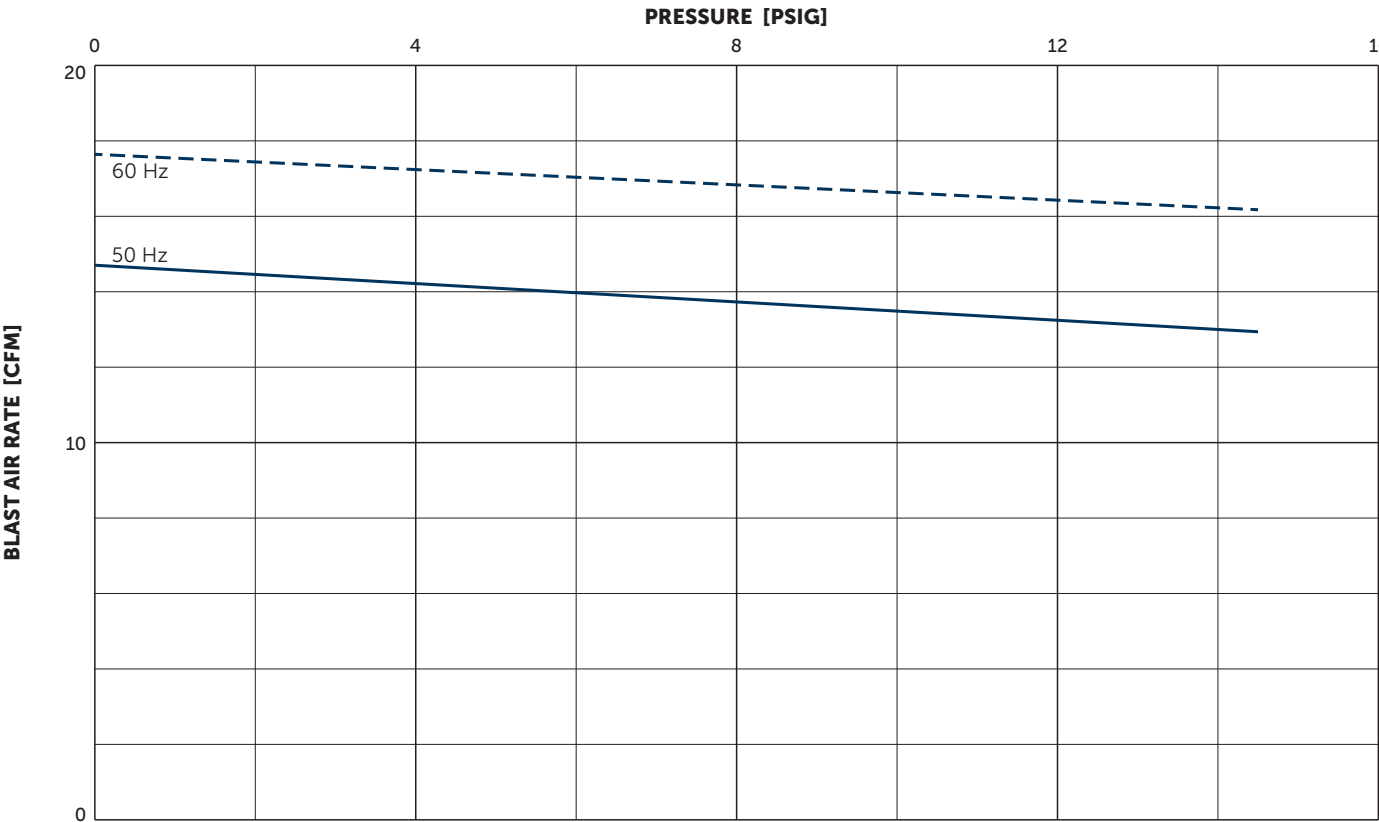

Reference data (atmosphere): 0 PSIG, 68°F; Tolerance: ±5%
Air temperature: 41°F ... 135°F

VARIANTS AND ACCESSORIES

- **DT 4.25/0-80** without compressed air cooler, maximum 8.7 PSIG, lower motor power and overall dimensions¹⁾
- With external suction filter¹⁾
- Sound proof box SH 20¹⁾



Example for an external suction filter



Sound proof box SH 20

¹⁾ See separate data sheet

- Possible combinations on request

MAKE IT BECKER.