



### Precision Solutions for Transforming Wastewater into Pure Water

We all know that the cleaner the induced air into a system, the easier and faster it is to achieve maximum degradation. **Becker blowers and compressors are 100% oil free** and the clear choice to deliver clean, clear air bubbles. Whether you have a Conventional Activated Sludge System (CAS) or an Aerated Stabilization Basin (ABS), Becker Pumps has the precise solution for you to **insure maximum degradation.**

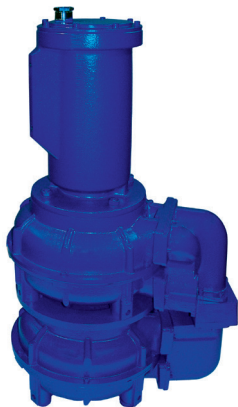

**Submersible SV Series**



**SV Series**



**DTLF Series**



**KDT Series**

#### Pump Features


- Clean 100% oil free air
- Built in filters/silencers
- Continuous duty operation
- Low maintenance
- Environmentally friendly
- Quiet operation
- Reliable

Contact our staff today. We're ready to help. Call 888-633-1083 or email: [info@beckerpumps.com](mailto:info@beckerpumps.com).



**Nationwide Sales and Service: USA, Canada, and Mexico 888-633-1083**

**Becker Pumps Corp.** • 100 East Ascot Lane • Cuyahoga Falls, Ohio 44223  
Tel 330-928-9966 • Fax 330-928-7065 • [info@beckerpumps.com](mailto:info@beckerpumps.com) • [www.beckerpumps.com](http://www.beckerpumps.com)



### Specifications

#### DT Series

Model	CFM	Max. Pressure PSIG	HP
DT 4.10	7	15	0.6
DT 4.16	11	15	1.0
DT 4.25 K	18	15	1.7
DT 4.40 K	28	15	3.0

#### KDT Series

Model	CFM	Pressure Range PSIG	HP Range
KDT 3.60	37	7.25-22	4.0-4.8
KDT 3.80	45	7.25-22	4.0-6.4
KDT 3.100	69	7.25-22	6.4-8.9
KDT 3.140	90	7.25-22	8.9-12.1

#### DTLF Series

Model	CFM	Pressure Range PSIG	HP Range
DTLF 2.200	127	7.25-26	8.9-17.7
DTLF 2.250	172	7.25-26	12.1-24.1
DTLF 2.250 K	166	7.25-26	12.1-24.1
DTLF 2.400	270	13.0-26	18-40
DTLF 2.500	336	11.6-26	24-46

#### Submersible SV Series

Model	CFM	Max. Pressure " WG	HP
SV 220/1 UW	155	64	1.5
SV 220/2 UW	78	132	1.5
SV 300/1 UW	212	120	2.9
SV 300/2 UW	106	160	2.9
SV 320/2 UW	112	280	5.4

#### SV Series

Model	CFM	Max. Pressure " WG	HP
Single Stage			
SV 130/1	94	24	0.9
		44	1.2
		78	1.7
		95	2.0
		121	2.4
SV 201/1	135	48	1.7
		80	2.4
		133	3.6
SV 300/1	229	56	3.6
		92	4.8
		137	6.4
SV 400/1	276	72	4.8
		109	6.4
		165	8.9
SV 500/1	359	70	6.4
		111	8.9
		163	12.1
SV 700/1	529	60	8.9
		101	12.1
		161	17.7
SV 1100/1	735	44	12.1
		88	17.7
		141	24.1

#### Two Stage

SV 130/2	50	56	0.9
		92	1.2
		157	1.7
SV 201/2	64	92	1.7
		161	2.4
SV 300/2	111	181	4.8
SV 400/2	138	141	4.8
		201	6.4
SV 500/2	179	213	8.9
SV 700/2	258	189	12.1
SV 1100/2	359	165	17.7

Contact our staff today. We're ready to help. Call 888-633-1083 or email: [info@beckerpumps.com](mailto:info@beckerpumps.com).



Nationwide Sales and Service: USA, Canada, and Mexico 888-633-1083

Becker Pumps Corp. • 100 East Ascot Lane • Cuyahoga Falls, Ohio 44223  
Tel 330-928-9966 • Fax 330-928-7065 • [info@beckerpumps.com](mailto:info@beckerpumps.com) • [www.beckerpumps.com](http://www.beckerpumps.com)